


Two-Hand Dynorbital® Sanders


- Lightweight, with smooth performance.
- Adjustable-speed control.
- Includes our best PSA urethane, weight-mated sanding pad.
- Long handle provides excellent comfort and control, especially when working on vertical sides of workpiece.
- Composite tool housing and handle create non-slip feel and reduce cold air transmission to operator.
- Hook-face pads available on pages 55 and 56.

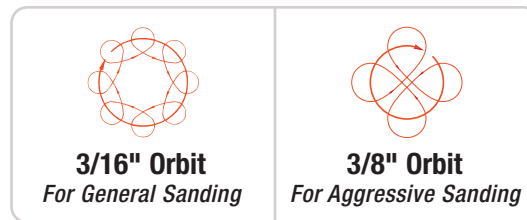

Non-Vacuum

- 5" and 6" models are 12,000 RPM. Pads have 5/16"-24 male spindle.
- 8" models are 10,000 RPM. Pads mount with screws.

| Pad Diameter | 3/16" Orbit Models | 3/8" Orbit Models |
|--------------|--------------------|-------------------|
| 5" | 10710 | 10730 |
| 6" | 10720 | 10733 |
| 8" | 10725 | N/A |

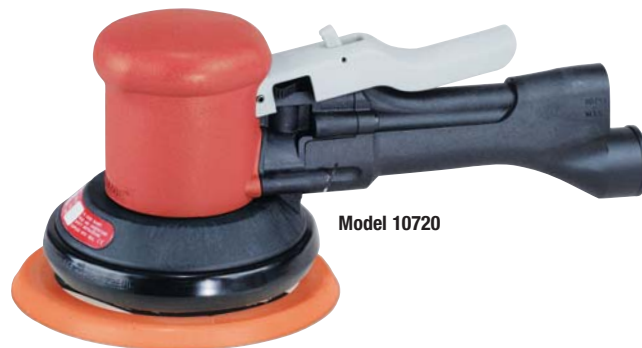

Vacuum-Ready

- Self-generated vacuum-ready models are ready for connection to portable dust collection systems (optional).

| Pad Diameter | 3/16" Orbit Models | 3/8" Orbit Models |
|--------------|--------------------|-------------------|
| 5" | 10712 | 10731 |
| 6" | 10722 | 10734 |
| 8" | 10727 | N/A |



Central Vacuum

- Ready for hook-up to portable or central vacuum system.
- All models include combination lip seal/overskirt shroud, which offers enhanced vacuum capability and greater workpiece visibility.

| Pad Diameter | 3/16" Orbit Models | 3/8" Orbit Models |
|--------------|--------------------|-------------------|
| 6" | 10724 | 10735 |
| 8" | 10729 | N/A |



SEE PAGE 55 & 56 FOR ORANGE SANDING PADS!

| Model Inch | Motor hp | Motor RPM | Orbit Dia. Inch | Maximum Air Flow CFM/SCFM | Hose I.D. Size Inch | Air Inlet Thread | Air Pressure PSIG | Weight Pound | Length Inch | Height Inch |
|------------|----------|-----------|-----------------|---------------------------|---------------------|------------------|-------------------|--------------|-------------|-------------|
| 5 | .45 | 12,000 | 3/16 | 3/23 | 1/4 | 1/4" NPT | 90 | 2.5 | 11-1/16 | 4-15/16 |
| 6 | .45 | 12,000 | 3/16 | 3/23 | 1/4 | 1/4" NPT | 90 | 5 | 11-3/8 | 4-15/16 |
| 8 | .45 | 12,000 | 3/16 | 3/23 | 1/4 | 1/4" NPT | 90 | 4 | 12-1/2 | 5-5/8 |