


DynaLocke® Dual Action Sander


Unique Disc Sander and Random Orbital Sander in one!

- Fast and Powerful
- Versatile
- Lightweight
- Soft grip housing insulates operator's hand from cold.
- Adjustable speed control; rear exhaust.
- All models include our best urethane hook-face sanding pad with common 5/16" -24 male thread.


Disc Sander OR 3/16" Random Orbital



ROTARY ORBIT Strip, level and grind to bare metal!



3/16" ORBIT Featheredge and finesse body panels!

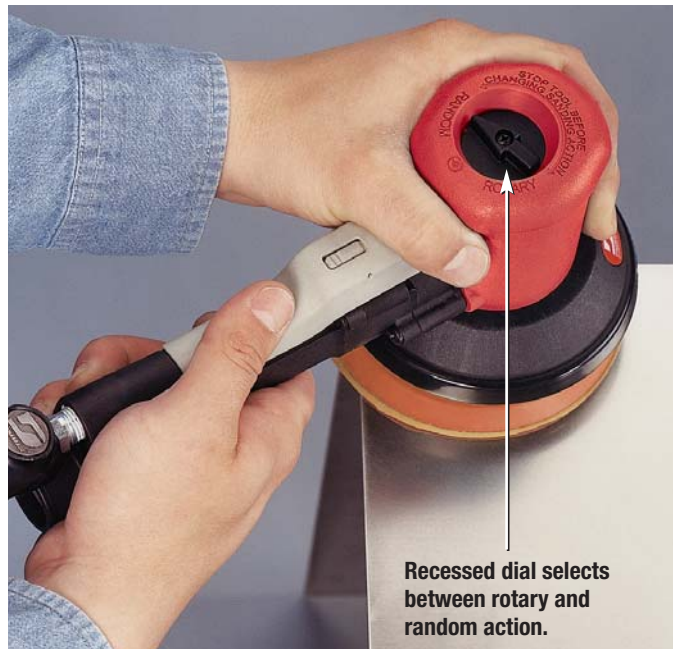

Recessed dial selects between rotary and random action.

**Amazing! Two Tools In One!
Performs Like No Other Sander!**

Non-Vacuum

Model 10770

3" Diameter

- Includes 56087 Pad.

Model 10780

3-1/2" Diameter

- Includes 54313 Pad.

Model 10750

5" Diameter

- Includes 54325 Pad.

Model 10754

6" Diameter

- Includes 54327 Pad.



Self-Generated Vacuum

- For connection to shop vac or central vacuum systems.
- Designed to vacuum in random orbital mode only.

Model 10771

3" Diameter

- Includes 56087 Pad.

Model 10781

3-1/2" Diameter

- Includes 54313 Pad.

Model 10752

5" Diameter

- Includes 54326 Pad.

Model 10756

6" Diameter

- Includes 54328 Pad.



Self-Generated Vacuum Model 10756

1-1/4" Dia. Vac Port

50617 Dust Collection System available. See page 53.

Model Description	Motor hp	Motor RPM	Air Flow Rate CFM/SCFM	Air Inlet Thread	Hose Size	Air Pressure PSIG	Weight Pound	Length Inch	Height Inch
3" Models	.45	12,000	3/23	1/4" NPT	1/4"	90	2.35	10-5/16	5-3/8
3-1/2" Models	.45	12,000	3/23	1/4" NPT	1/4"	90	2.35	10-5/16	5-3/8
5" Models	.45	12,000	3/23	1/4" NPT	1/4"	90	2.6	11-1/16	5-1/8
6" Models	.45	12,000	3/23	1/4" NPT	1/4"	90	2.7	11-1/2	5-1/8