

Wet Dynafine® Detail Sander

Model 10880

- Tiny 1/32" diameter orbital action for a superior finish.
- Hooks directly up to hose or optional wet tank.
- Perfect for quick spot repair and efficient removal of dust nibs on clear coat paint systems. With built-in misting system, operator can spray the work surface then remove the imperfection – all within seconds!
- Powerful .15 hp air motor, 13,000 RPM.
- Accepts 2" and 3" diameter sanding pads (PSA or hook-face) for corresponding abrasive discs. One PSA pad of each diameter is included with tool.
- Misting System helps flush abrasive to achieve a consistent, repeatable finish.
- Ergonomic 7° offset design for greater operator comfort and control.
- Rear exhaust directs air away from work piece; reduces sound levels.
- Insulated tool housing reduces cold air transmission to the operator.
- Includes 10 ft. water line with Male Quick Disconnect and faucet/garden hose connection (see below).
- Optional hook-face pads available on page 57.




*Features Our
"Finger Touch"
Misting System
for Total Water
Control!*



2" Dia. Pad
Shown

Composite Dynaswivel®
Flow-Control Speed
Regulator is included.

Includes Faucet/Garden Hose Connection

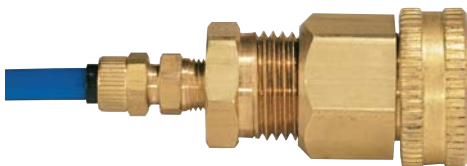

Optional Portable Wet Tank

Part No. 96575

- Two gallon capacity. Makes wet sanders self-sufficient; no need for a garden hose.
- Translucent tank allows easy viewing of liquid level.
- Hand pump manually pressurizes container (50 PSI maximum pressure).



Model Number	Motor hp	Motor RPM	Sound Level	Air Flow Rate CFM/SCFM	Hose Size	Air Inlet Thread	Weight Pound	Length Inch	Height Inch
10880	.15	13,000	65 dB(A)	3/20	1/4"	1/4" NPT	1.75	9	3-3/4