

Push-Button, Composite Couplers & Plugs

Couplers

- Available in 1/4" female and male NPT styles.
- Lightweight 1.4 oz., non-marring composite material.
- Heavy duty construction.
- Shock-proof, low-vibration, crush-resistant.
- Easy push-button action to disconnect!



Female Coupler




Male Coupler

Part Number	Thread Size	Air Flow Range
94960	1/4" Female NPT	Up to 83 SCFM
94980	1/4" Male NPT	Up to 83 SCFM

Plugs

- Available in 1/4", 3/8" and 1/2" female and male NPT styles.
- Durable zinc-plated steel construction.
- Plugs have "ported" design to prevent "starving" of the air tool.
- Provides up to twice the air flow compared to standard plug design.

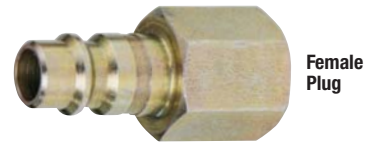

Female Plug



Male Plug

Part Number	Thread Size	Air Flow Range
95675	1/4" Male NPT	Up to 74 SCFM
95677	1/4" Female NPT	Up to 74 SCFM

Assemblies

- Available in 1/4" female and male NPT styles.
- Assembly includes one composite-style coupler and one plug.
- Maximum working pressure: 150 PSI.
- Temperature range: -4°F to 212°F.

Part Number	Coupler Thread Size	Plug Thread Size
94990	1/4" Female NPT	1/4" Male NPT
94991	1/4" Female NPT	1/4" Female NPT
94992	1/4" Male NPT	1/4" Male NPT
94993	1/4" Male NPT	1/4" Female NPT



Female to Male Assembly



Female to Female Assembly



Male to Male Assembly



Male to Female Assembly



Connect/Disconnect Air Hoses with Ease!