

Spring-Action, Steel Couplers & Plugs

Couplers

- “Ported” design for maximum air flow!
- Available in 1/4", 3/8" and 1/2" female and male NPT styles.
- Durable nickel-plated steel and brass construction.
- Single action quick-connect by just inserting plug into coupler. Pull back on sleeve of coupler for quick disconnect.


Part Number	Thread Size	Air Flow Range
95674	1/4" Female NPT	Up to 74 SCFM
95684	1/4" Male NPT	Up to 74 SCFM
98261	3/8" Female NPT	Up to 138 SCFM
98262	3/8" Male NPT	Up to 138 SCFM
98269	1/2" Female NPT	Up to 138 SCFM
98270	1/2" Male NPT	Up to 138 SCFM



Plugs

- Available in 1/4", 3/8" and 1/2" female and male NPT styles.
- Durable zinc-plated steel construction.
- Plugs have “ported” design to prevent “starving” of the air tool.
- Provides up to twice the air flow compared to standard plug design.

Part Number	Thread Size	Air Flow Range
95675	1/4" Male NPT	Up to 74 SCFM
95677	1/4" Female NPT	Up to 74 SCFM
98263	3/8" Male NPT	Up to 138 SCFM
98264	3/8" Female NPT	Up to 138 SCFM
98271	1/2" Male NPT	Up to 138 SCFM
98272	1/2" Female NPT	Up to 138 SCFM

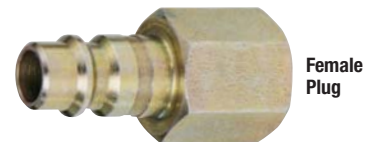

Assemblies

- Assembly includes one coupler and one plug.
- Available in 1/4", 3/8" and 1/2" female and male NPT styles.
- Maximum working pressure: 232 PSI.
- Temperature range: -4°F to 212°F.

Part Number	Coupler Thread Size	Plug Thread Size
95676	1/4" Female NPT	1/4" Male NPT
95850	1/4" Female NPT	1/4" Female NPT
95685	1/4" Male NPT	1/4" Male NPT
95851	1/4" Male NPT	1/4" Female NPT
98265	3/8" Female NPT	3/8" Male NPT
98266	3/8" Female NPT	3/8" Female NPT
98267	3/8" Male NPT	3/8" Male NPT
98268	3/8" Male NPT	3/8" Female NPT
98273	1/2" Female NPT	1/2" Male NPT
98274	1/2" Female NPT	1/2" Female NPT
98275	1/2" Male NPT	1/2" Male NPT
98276	1/2" Male NPT	1/2" Female NPT

