


ACCESSORIES

169

Random Orbital and Gear-Driven Sanding Pads


Premium Foam Pads for Large Diameter Sanders - For use on Both Non-Vacuum and Vacuum Models

3,000 RPM maximum operating speed • Mounts with five screws • Five holes • Medium density



Vinyl-Face Pads

Ideal for PSA-type disc adhesion. Remove abrasive adhesive paper liner and press abrasive to vinyl-face sanding pad. Quick disc removal.



Hook-Face Pads

Short nap pads for use with reattachable discs.



Loop-Face Pads

Pads accept 3M™ Hookit™ II abrasives.



Non-Vacuum/Vacuum Pads



Pad Diameter	Part Number	Face	Nap	Thickness
11" (279 mm)	56230	Vinyl	—	1/2" (13 mm)
	56231	Hook	Short	1/2" (13 mm)
	56232	Loop	—	1/2" (13 mm)



Pad Conversions

Hook-to-Hookit™ II


For use with 11" (279 mm) diameter sanders

Part Number 56220

- Thin velcro-backed sheet attaches to standard hook-face pad and accepts Hookit™ II abrasives.
- For non-vacuum use only.

Standard loop material attaches to standard hook-face sanding pad

Loop-face for Hookit™ II abrasives

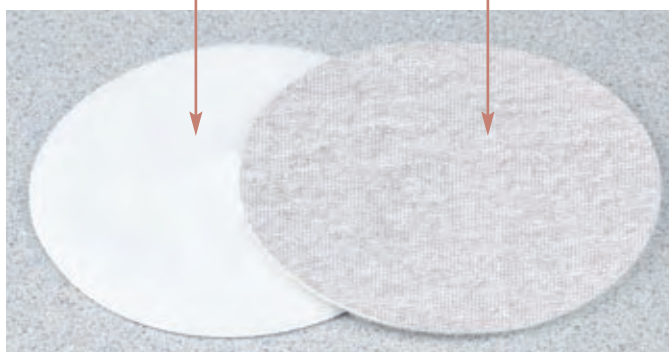

Hook-to-Vinyl

Non-vacuum and vacuum use

- Thin velcro-backed sheet attaches to standard hook-face pad and accepts PSA-type abrasives.

Part No.	Diameter	
53992	5" (127 mm)	
53993	6" (152 mm)	



Loop material attaches to standard hook-face sanding pad



Premium vinyl-face for PSA-type abrasives