## Wet Dynorbital® Supreme

Air-Powered Wet Random Orbital Sander

## ABRASIVE DISCS 3-1/2" (89 mm), 5" (127 mm), 6" (152 mm) diameter

## For Polishing and Finishing Flats and Sides

## **Deluxe Models**

- Deluxe models include 1/4" diameter x 11' long water line and 1/4" diameter x 10' long air line, both neatly contained in 3/4" diameter overhose.
- Incldes adjustable "water feed" valves at two locations: one near the water source connection and another at the tool. This allows one valve to be pre-set to your desired flow rate, while the other is utilized as an on/off valve.



**3/16" (5 mm) Dia. Random Orbit** For Swirl-Free Finishes



**3/32" (2 mm) Dia. Random Orbit** For Ultra-Fine Finishes

Model 57571 3-1/2" Diameter, 3/16" Orbit

• Includes 54311 Hook-Face Pad.

Model 57573 5" Diameter, 3/16" Orbit Model 57583 5" Diameter, 3/32" Orbit

• Both models include 54325 Hook-Face Pad.

Model 57575 6" Diameter, 3/16" Orbit Model 57585 6" Diameter, 3/32" Orbit


• Both models include 54327 Hook-Face Pad.







Wet Dynorbital® Supreme achieves swirl-free finish.

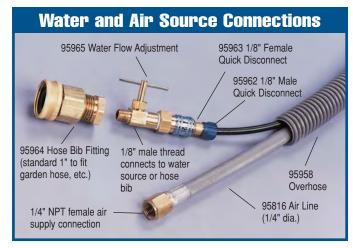

Model Number	Motor hp (W)	Motor RPM	Pad Dia. Inch (mm)	Sound Level	Maximum Air Flow SCFM (LPM)	Hose I.D. Size Inch (mm)	Air Inlet Thread	Tool Thread	Weight Pound (kg)	Length Inch (mm)	Height Inch (mm)
57571	.24 (179)	10,000	3-1/2 (89)	76 dB(A)	16 (453)	1/4 (6)	1/4" NPT	5/16"-24 Female	2.1 (1.0)	6 (152)	3-3/4 (95)
57573	.24 (179)	10,000	5 (127)	77 dB(A)	16 (453)	1/4 (6)	1/4" NPT	5/16"-24 Female	2.1 (1.0)	6-1/2 (165)	3-5/8 (92)
57575	.24 (179)	10,000	6 (152)	74 dB(A)	16 (453)	1/4 (6)	1/4" NPT	5/16"-24 Female	2.2 (1.0)	7 (178)	3-1/2 (89)
57583	.24 (179)	10,000	5 (127)	77 dB(A)	16 (453)	1/4 (6)	1/4" NPT	5/16"-24 Female	2.1 (1.0)	6-1/2 (165)	3-5/8 (92)
57585	.24 (179)	10,000	6 (152)	74 dB(A)	16 (453)	1/4 (6)	1/4" NPT	5/16"-24 Female	2.2 (1.0)	7 (178)	3-1/2 (89)

Tune-Up Kit: No. 96018 (page 192) • Additional Specifications: Air Pressure 90 PSIG (6.2 Bar)

