

Drills

Air-Powered Drills, 3/8" Chuck

Industrial-Quality Drills in a Variety of Configurations

ABRASIVE CAPACITY
DRILL BITS & ACCESSORIES
3/8" (10 mm) dia. maximum

Pistol Grip, .7 hp, Rear Exhaust

- Each model includes 3/8" drill chuck and key.
- High-torque air motor; slow-speed startup trigger.
- Rubber insulated grip and removable side handle.

Model 53091 950 RPM


Model 53060 3,400 RPM

Model 53095 4,500 RPM


Model 53096 20,000 RPM



Dynaswivel® air line connector is ideal for use with most air tools. The Dynaswivel® improves tool maneuverability, minimizes operator fatigue and extends hose life. (See page 163.)

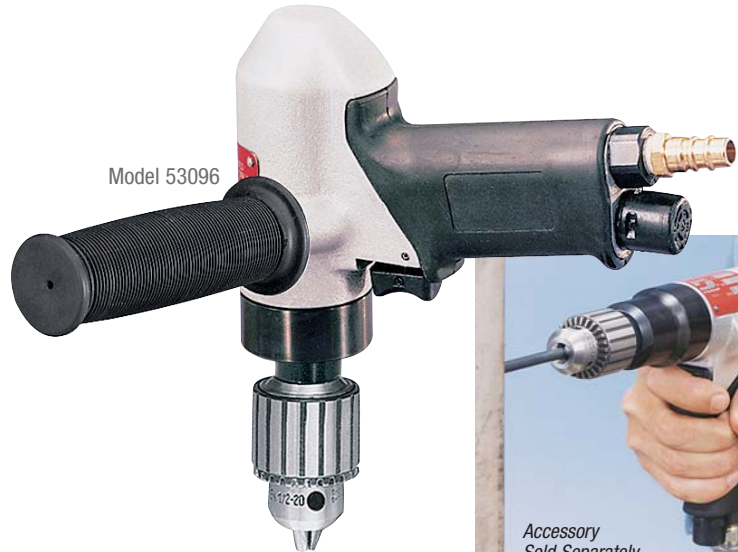

Model 53096

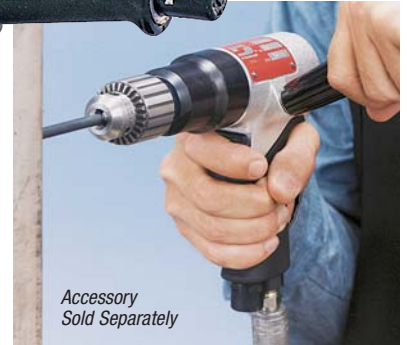

Accessory Sold Separately

7° Offset .4 hp, Rear Exhaust, Self-Generated Vacuum

- Each model includes 3/8" drill chuck and key.
- Self-generated vacuum tool includes 50682 exhaust hose (6' long) and 50683 reusable cloth bag. As tool is run, dust and debris are diverted through hose and into bag.
- Vacuum shroud retracts to allow full view of work surface.
- Convenient trigger mechanism allows easy one-hand operation of drill.
- Ideal for rivet work, aluminum and aviation applications.

Model 53200 3,200 RPM

Model 53210 5,000 RPM




Motor Tune-Up Kits will extend the life of an air tool when used as part of a preventative maintenance schedule. (See page 192.)



Model 53200



Includes 50683 Cloth Bag and 50682 hose (1" dia., 6' long)

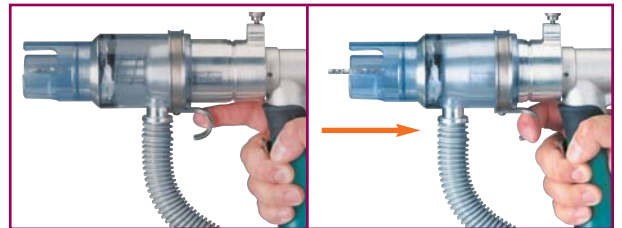

Trigger mechanism allows one-hand operation of drill.

Model Number	Motor hp (W)	Motor RPM	Sound Level	Maximum Air Flow SCFM (LPM)	Hose I.D. Size Inch (mm)	Air Inlet Thread	Spindle Thread	Weight Pound (kg)	Length Inch (mm)	Height Inch (mm)
53060	.7 (522)	3,400	84 dB(A)	33 (935)	3/8 (10)	1/4" NPT	1/2"-20 Male	3.2 (1.4)	8-7/8 (224)	6-3/8 (163)
53091	.7 (522)	950	82 dB(A)	33 (935)	3/8 (10)	1/4" NPT	1/2"-20 Male	3.9 (1.8)	10-1/2 (267)	6-3/8 (163)
53095	.7 (522)	4,500	85 dB(A)	33 (935)	3/8 (10)	1/4" NPT	1/2"-20 Male	3.2 (1.4)	8-7/8 (224)	6-3/8 (163)
53096	.7 (522)	20,000	88 dB(A)	33 (935)	3/8 (10)	1/4" NPT	3/8"-24 Male	2.4 (1.1)	7 (180)	6-3/8 (163)
53200	.4 (298)	3,200	86 dB(A)	24 (680)	1/4 (6)	1/4" NPT	3/8"-24 Male	3.2 (1.45)	10-1/2 (267)	10 (254)
53210	.4 (298)	5,000	86 dB(A)	24 (680)	1/4 (6)	1/4" NPT	3/8"-24 Male	3.2 (1.45)	10-1/2 (267)	10 (254)

Tune-Up Kits: 53060, 53091, 53095, 53096: **No. 96047**; 53200, 53210: **No. 96174** (page 192) • Additional Specifications: Air Pressure 90 PSIG (6.2 Bar)



FASTTRACK

Accessories: Page 159