

DynaJet In-Line Blow Gun

Clean Off Work Surfaces Without Disconnecting

- Only connect once... permanently mounts between coupler and air hose to purge air line of water and contaminants before starting up air tools.
- Durable aluminum construction, weighs only 2 oz. (0.06 kg).

Part Number 94466

Standard Design

- Provides no restriction of air line pressure.

Part Number 94467

Safety Tip Design

- Reduces line pressure down to 30 PSIG (2 Bar).
- Meets O.S.H.A. requirements of special relief hole in nozzle which limits pressure to 30 PSIG (2 Bar) when dead ended and used on an air line of 150 PSIG (10.3 Bar) or less.

Part Number	Thread Size	Weight kg (lb.)	Recommended Air Flow Range SCFM (LPM)
94466	1/4" Female NPT	0.06 kg	up to 35 SCFM (991 LPM)
94467	1/4" Female NPT	0.06 kg	up to 991 LPM

10.3 Bar (150 PSIG) maximum on all models




Part Number 94466



Part Number 94467

Proper Installation for DynaJet In-Line Blow Gun Connection

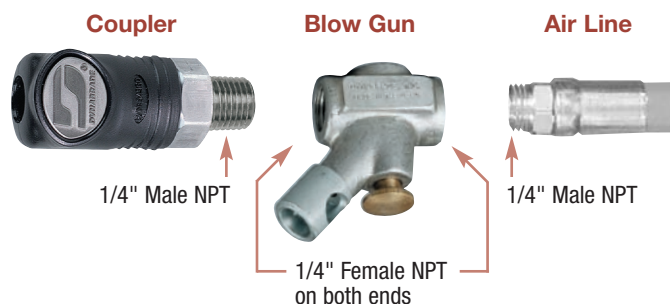

Filter-Regulator-Lubricator

Cost-Effective Solutions for Air Supply Systems

Filter

- Five-micron filter element is standard.
- Manual push-button drain easily discharges contaminants.

Part Number	Air Inlet Thread
10671	1/2" NPT



Regulator

- Compensation built into unit responds faster to changes in incoming pressure and flow.
- Built-in PSI pressure dial gauge.

Part Number	Air Inlet Thread
10673	1/2" NPT



Lubricator

- Built-in check valve permits tool to be filled with oil without having to turn off air pressure.
- Adjustable oil drop to meter amount of oil into air system.

Part Number	Air Inlet Thread
10675	1/2" NPT



Each unit includes two bushings for easy conversion to 3/8" NPT.

Additional Specifications: Maximum Operating Pressure 145 PSIG.

Filter-Regulator

- Unit has modular connections with mounting brackets for easy installation.

Part Number	Air Inlet Thread
10677	1/2" NPT



Regulator-Lubricator

- Unit has modular connections with mounting brackets for easy installation.

Part Number	Air Inlet Thread
10679	1/2" NPT



Filter-Regulator-Lubricator

- Unit has modular connections with mounting brackets for easy installation.

Part Number	Air Inlet Thread
10681	1/2" NPT



FRL Flow Characteristics

Flow • SCFM (LPM)	Pressure Drop Across FRL • PSI (Bar)
15 (425)	2.0 (.14)
30 (850)	3.0 (.21)
45 (1274)	6.0 (.41)
60 (1699)	7.0 (.48)
75 (2124)	8.0 (.55)