

# Eyelet Sanding Stars and Mandrels

*Ideal for Deburring and Polishing Hard-to-Reach Areas*

**For Use with Lightweight Dyninger**

- Eyelet sanding stars are available in the following diameters: 3/4", 1", 1-1/2", 2", 3" and 4".
- Use with Lightweight Dyninger models 52050 and 52051, and Die Grinder models. See chart below for maximum operating speeds.
- Excellent for wooden parts, moldings, raised panels and intricate profiles. Eliminates raised grain and removes loose fibers when whitewood sanding as well as scuffing sealer coats.
- Provides uniform, smooth surface for achieving the best top coats.
- Metalworking applications include setting in-line scratch on stainless steel.
- Polish and deburr inside diameters of pipe and tubing.




*3" Eyelet Sanding Star easily enters pipe elbow using 7" long flexible mandrel.*

*Sand and deburr inside small dia. pipe and other hard to reach areas with 3/4" – 1-1/2" stars.*



The grit and spacing of the stars determine sanding aggressiveness. We suggest exploring various grit and spacing combinations.

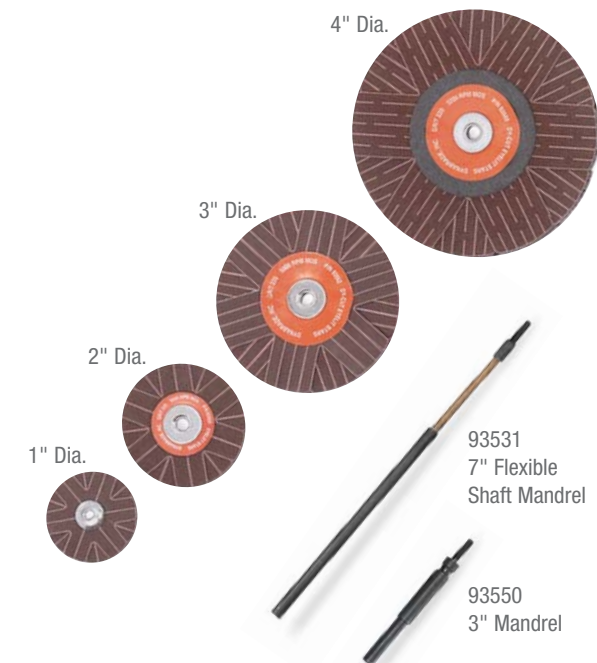

**NOTE:** The rated RPM of a mounted sanding star is reduced when using flexible shafts. When using the flex shaft for finishing inside diameters, place the eyelet sanding star inside the workpiece, then start the tool.

## CHOOSE EYELET STAR...

| Diameter<br>Inch (mm) | 80    | 120   | 150   | Grit<br>180 | 220   | 320   | 400   |
|-----------------------|-------|-------|-------|-------------|-------|-------|-------|
| 3/4 (19)              | 93579 | 93580 | 93581 | 93582       | 93583 | —     | —     |
| 1 (25)                | 93586 | 93587 | 93588 | 93589       | 93590 | —     | —     |
| 1-1/2 (38)            | 93541 | 93542 | 93543 | 93544       | 93545 | 93546 | 93547 |
| 2 (51)                | 93551 | 93552 | 93553 | 93554       | 93555 | 93556 | 93557 |
| 3 (76)                | 93558 | 93559 | 93560 | 93561       | 93562 | 93563 | 93564 |
| 4 (102)               | 93565 | 93566 | 93567 | 93568       | 93569 | —     | —     |

## ...THEN CHOOSE MANDREL

| Mandrel<br>P/N | Length<br>Inch (mm) | Max. Operating<br>Speed | Male<br>Thread |
|----------------|---------------------|-------------------------|----------------|
| 93534          | 3 (76)              | 5,000                   | 3-48           |
| 93533          | 7 (178) Flex        | 3,200                   | 3-48           |
| 93548          | 3 (76)              | 5,000                   | 8-32           |
| 93532          | 7 (178) Flex        | 3,200                   | 8-32           |
| 93550          | 3 (76)              | 5,000                   | 1/4"-20        |
| 93531          | 7 (178) Flex        | 3,200                   | 1/4"-20        |
| 93550          | 3 (76)              | 5,000                   | 1/4"-20        |
| 93531          | 7 (178) Flex        | 3,200                   | 1/4"-20        |