Wet Dynorbital® Supreme

Air-Powered Wet Random Orbital Sander

ABRASIVE DISCS 3-1/2" (89 mm), 5" (127 mm), 6" (152 mm) diameter

For Polishing and Finishing Flats and Sides

Deluxe Models

- Include 1/4" diameter x 11' long water line and 1/4" diameter x 10' long air line, both contained in 3/4" diameter overhose.
- Include adjustable "water feed" valves at two locations: one near the water source connection and another at the tool. This allows one valve to be pre-set to your desired flow rate, while the other is utilized as an on/off valve.



3/16" (5 mm) Dia. Random Orbit For Swirl-Free Finishes

Model 57571 3-1/2" Diameter, 3/16" Orbit

• Includes 54311 Hook-Face Pad.

Model 57573 5" Diameter, 3/16" Orbit

• Includes 54325 Hook-Face Pad.

Model 57575 6" Diameter, 3/16" Orbit

• Includes 54327 Hook-Face Pad.




3/32" (2 mm) Dia. Random Orbit *For Ultra-Fine Finishes*

Model 57583 5" Diameter, 3/32" Orbit

• Includes 54325 Hook-Face Pad.

Model 57585 6" Diameter, 3/32" Orbit

• Includes 54327 Hook-Face Pad.

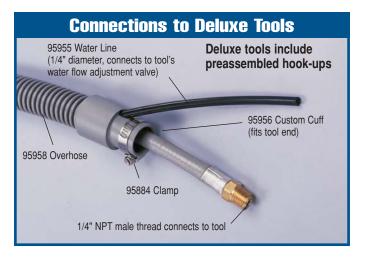





Wet Dynorbital® Supreme achieves swirl-free finish.



Model Number	Motor hp (W)	Motor RPM	Pad Dia. Inch (mm)	Sound Level	Maximum Air Flow SCFM (LPM)	Hose I.D. Size Inch (mm)	Air Inlet Thread	Tool Thread	Weight Pound (kg)	Length Inch (mm)	Height Inch (mm)
57571	.28 (209)	12,000	3-1/2 (89)	76 dB(A)	18 (510)	1/4 (6)	1/4" NPT	5/16"-24 Female	2.1 (1.0)	6 (152)	3-3/4 (95)
57573	.28 (209)	12,000	5 (127)	77 dB(A)	18 (510)	1/4 (6)	1/4" NPT	5/16"-24 Female	2.1 (1.0)	6-1/2 (165)	3-5/8 (92)
57575	.28 (209)	12,000	6 (152)	74 dB(A)	18 (510)	1/4 (6)	1/4" NPT	5/16"-24 Female	2.2 (1.0)	7 (178)	3-1/2 (89)
57583	.28 (209)	12,000	5 (127)	77 dB(A)	18 (510)	1/4 (6)	1/4" NPT	5/16"-24 Female	2.1 (1.0)	6-1/2 (165)	3-5/8 (92)
57585	.28 (209)	12,000	6 (152)	74 dB(A)	18 (510)	1/4 (6)	1/4" NPT	5/16"-24 Female	2.2 (1.0)	7 (178)	3-1/2 (89)

Tune-Up Kit: No. 96018 (page 192) • Additional Specifications: Air Pressure 90 PSIG (6.2 Bar)

