

3" Diameter Buffers

.4 hp, Air-Powered Buffing Tool

For Repair of Sanding Scratches on Clearcoat


ABRASIVE CAPACITY
TERRY CLOTH, WOOL, FOAM BUFFS
 3" (76 mm) diameter

Model 53440 3" Diameter, 3,200 RPM


- Tool comes mounted with 54021 Adapter (1/4"-20 male thread).
- Includes 50120 Hook-Face Pad (3" diameter), which mounts directly to 54021 Adapter.
- Also includes 90027 Terry Cloth Bonnet and 90028 Wool Buffing Bonnet.
- Rear exhaust, lever throttle, rotary action.



Model 53440

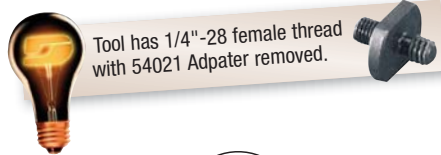

Tool has 1/4"-28 female thread with 54021 Adapter removed.



Rotary Orbital Motion



Dynaswivel® air line connector is ideal for use with most air tools. The Dynaswivel® improves tool maneuverability, minimizes operator fatigue and extends hose life. (See page 163.)




Model 53440

Model 53440 achieves high gloss finish when used with Dynabrade Finesse Sanding Creme and Dynabrade Glaze (each sold separately).

Model 53403 Versatility Kit

- Repair dust nibs and scratches on clearcoat.
- Includes: 3,200 RPM air tool, 54028 Random Orbital Sanding Head, two sanding pads, 50120 Hook 'n Loop Pad for bonnets, 54021 Adapter, wool and terry cloth bonnets, 95723 Finesse Sanding Creme, 95727 Dynabrade Glaze, assorted wrenches and sample abrasives.

Note: Optional 54585 Side Handle Assembly available.



3/16" (5 mm) Dia. Orbit
 (with 54028 Head Attached)



Model 53403

Model Number	Motor hp (W)	Motor RPM	Sound Level	Maximum Air Flow SCFM (LPM)	Hose I.D. Size Inch (mm)	Air Inlet Thread	Tool Thread	Weight Pound (kg)	Length Inch (mm)	Height Inch (mm)
53440	.4 (298)	3,200	83 dB(A)	23 (651)	1/4 (6)	1/4" NPT	1/4"-20 Female	1.9 (.9)	11-3/8 (289)	2-3/4 (70)

Tune-Up Kit: No. 96333 (page 192) • Additional Specifications: Air Pressure 90 PSIG (6.2 Bar)



FASTTRACK