

# Wet Dynorbital® Supreme

## Air-Powered Random Orbital Sander



**SANDING PADS**  
PAGE 231


**ACCESSORIES**  
PAGE 222

*For Polishing and Finishing Flats and Sides*

**FOR ABRASIVE DISCS**  
3-1/2" (89 mm), 5" (127 mm)  
and 6" (152 mm) dia.  
*SEE PAGE 275*

### Deluxe Models

- Include 1/4" diameter x 11' long water line and 1/4" diameter x 10' long air line, both contained in 3/4" diameter overhose.
- Include adjustable "water feed" valves at two locations: one near the water source connection and another at the tool. This allows one valve to be pre-set to your desired flow rate, while the other is utilized as an on/off valve.



**3/16" (5 mm) Dia. Random Orbit**  
*For Swirl-Free Finishes*

### Model 57571 3-1/2" Diameter, 3/16" Orbit

- Includes 54311 Hook-Face Pad.

### Model 57573 5" Diameter, 3/16" Orbit

- Includes 54325 Hook-Face Pad.

### Model 57575 6" Diameter, 3/16" Orbit

- Includes 54327 Hook-Face Pad.



**3/32" (2.5 mm) Dia. Random Orbit**  
*For Ultra-Fine Finishes*

### Model 57583 5" Diameter, 3/32" Orbit

- Includes 54325 Hook-Face Pad.

### Model 57585 6" Diameter, 3/32" Orbit

- Includes 54327 Hook-Face Pad.




Model 57573




Model 57575

*Wet Dynorbital® Supreme achieves swirl-free finish.*

### Connections to Deluxe Tools

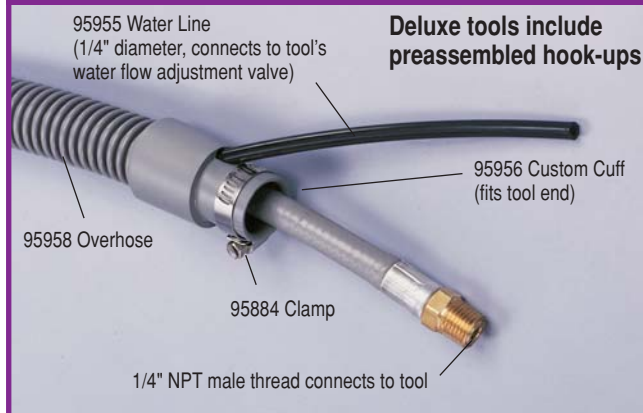

### Water and Air Source Connections

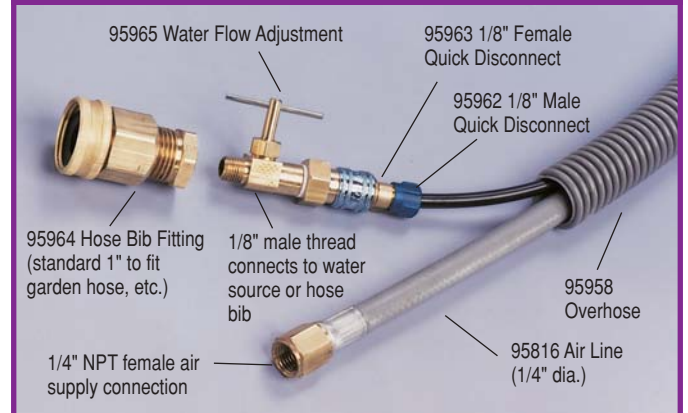

Model Number	Motor hp (W)	Motor RPM	Pad Dia. Inch (mm)	Sound Level	Maximum Air Flow SCFM (L/Min)	Hose I.D. Size Inch (mm)	Air Inlet Thread	Tool Thread	Weight Pound (kg)	Length Inch (mm)	Height Inch (mm)
57571	.28 (209)	12,000	3-1/2 (89)	74 dB(A)	18 (510)	1/4 (6)	1/4" NPT	5/16"-24 Female	2.1 (1.0)	6 (152)	3-3/4 (95)
57573	.28 (209)	12,000	5 (127)	78 dB(A)	18 (510)	1/4 (6)	1/4" NPT	5/16"-24 Female	2.1 (1.0)	6-1/2 (165)	3-5/8 (92)
57575	.28 (209)	12,000	6 (152)	76 dB(A)	18 (510)	1/4 (6)	1/4" NPT	5/16"-24 Female	2.2 (1.0)	7 (178)	3-1/2 (89)
57583	.28 (209)	12,000	5 (127)	76 dB(A)	18 (510)	1/4 (6)	1/4" NPT	5/16"-24 Female	2.1 (1.0)	6-1/2 (165)	3-5/8 (92)
57585	.28 (209)	12,000	6 (152)	78 dB(A)	18 (510)	1/4 (6)	1/4" NPT	5/16"-24 Female	2.2 (1.0)	7 (178)	3-1/2 (89)

**Tune-Up Kit: No. 96018** (page 267) • Additional Specifications: Air Pressure 90 PSIG (6.2 Bar)