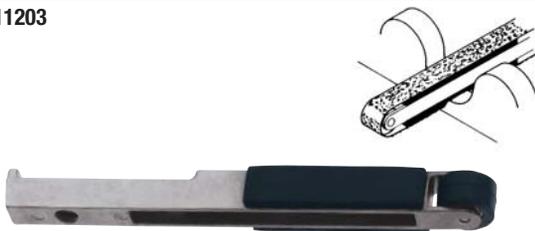


# Dynaflex® III Contact Arms

## 4" to 6-3/4" Workable Reach

• All rubber Contact Wheels are 70 durometer, unless noted.

Part Number	Comments	Belt Size (W x L)	Contact Wheel Assembly (includes bearing and shaft)	Platen Pad (see page 29)
<b>11200</b> 	<ul style="list-style-type: none"> <li>• Work on broad areas</li> <li>• Leave in-line scratch</li> <li>• Blend stainless</li> </ul>	1/2" x 18"	11088 5/8" dia. x 3/8" wide, rubber	11025 1/2" wide; Soft
<b>11203</b> 	<ul style="list-style-type: none"> <li>• <b>Standard on Models 40335 and 40610</b></li> <li>• Grind over contact wheel or platen</li> <li>• Order 11312 for heavy-duty, or 11325 for steel platen version</li> </ul>	1/2" x 18"	11078 5/8" dia. x 3/8" wide, rubber	11025 1/2" wide; Soft
<b>11204, 11305</b> 	<ul style="list-style-type: none"> <li>• Unique offset design</li> <li>• Strap polishing is easy with this arm</li> </ul>	1/8", 1/4" or 1/2" x 18"	11204: 11080 Wheel, 1" dia. x 3/8" wide, 70 duro, radiused rubber  11305: 11093 Wheel, 1" dia. x 3/8" wide, 40 duro, radiused rubber	None
<b>11206</b> 	<ul style="list-style-type: none"> <li>• <b>Standard on Models 15400, 40320 and 40330</b></li> <li>• Order 11326 for heavy-duty steel construction version</li> </ul>	5/8" or 3/4" x 18"	11282 3/4" dia. x 5/8" wide, rubber	11109 3/4" wide; Hard
<b>11286</b> 	<ul style="list-style-type: none"> <li>• Optional 11024 Steel Platen Pad available</li> <li>• 6-3/4" workable reach</li> </ul>	1/2" x 24"	11078 5/8" dia. x 3/8" wide, rubber	11025 1/2" wide; Soft
<b>11287</b> 	<ul style="list-style-type: none"> <li>• <b>Standard on Models 15401 and 40326</b></li> <li>• Grind on wheel or platen</li> <li>• 5-1/4" reach</li> </ul>	5/8" or 3/4" x 20-1/2"	11282 3/4" dia. x 5/8" wide, rubber	11109 3/4" wide; Hard
<b>11320</b> Offset Arm 	<ul style="list-style-type: none"> <li>• For flat grinding using platen at or near corners and edges of large radius round</li> <li>• Contact wheel is offset to prevent gouging bus bars</li> </ul>	1/2" x 18"	11078 5/8" dia. x 3/8" wide, rubber	11026 1/2" wide; Hard
<b>11702</b>  <p>For use on 15420 Dynaflex® III only (see page 21)</p>	<ul style="list-style-type: none"> <li>• Perfectly designed to reach up to 2" in a channel</li> <li>• Great for use with scalloped edge abrasives, blending weld seams</li> </ul>	1/4" or 1/2" x 24"	11638 70 durometer 4" dia. x 1/2" wide, radiused rubber	None