



*For grinding applications with
Dynabrade Angle Grinders.*

DF 424Z FLAP DISCS – FLAT CONTACT


**Alumina Zirconia flap discs
mounted on fibreglass backing.**



DIMENSION	ATTACHMENT TYPE	GRIT	P/N	QTY/BOX
115 mm	Hole 22 mm	P40	72852	10
115 mm	Hole 22 mm	P60	72854	10
115 mm	Hole 22 mm	P80	72855	10
115 mm	Hole 22 mm	P120	72857	10
125 mm	Hole 22 mm	P40	72862	10
125 mm	Hole 22 mm	P60	72864	10
125 mm	Hole 22 mm	P80	72865	10
125 mm	Hole 22 mm	P120	72867	10

APPLICATIONS & MARKETS

- Surface grinding on stainless steel or high-alloyed steel applying appropriate pressure.
- Fast stock removal, ideal for epoxy, old paint & rough coatings.
- Removes welding seams.
- Used in Marine, Automotive Aftermarket and General Metal Industries.

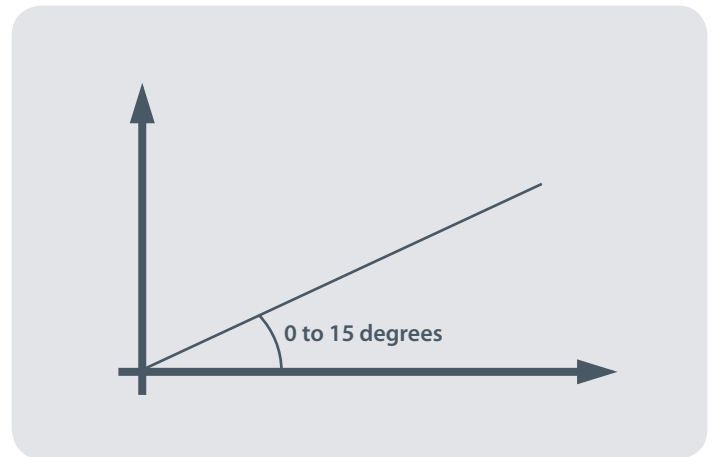

NOTE: Flap discs to be used at an angle of 0 to 15 degrees.

FEATURES & BENEFITS

- Excellent price-value ratio with 80 flaps per disc.
- Zirconia Alumina coated abrasive allows fast stock removal while giving a smooth surface finish thanks to the flexibility of the backing.
- As coated abrasive cloth-backed flaps wear down progressively, new sharp abrasive grains are constantly exposed, producing a consistently high cut-rate throughout disc lifetime.
- High density of 80 flaps allows a fast and aggressive cutting.
- Suitable for grinding new generation water based lacquers.
- Flat contact surface of the DF 424Z flap disc offers a smooth grinding action.



DYNABRADE EUROPE S.à.r.l.

ZONE ARTISANALE OP TOMM 6 • L-5485 WORMELDANGE-HAUT • LUXEMBOURG • TEL.: +352 768 494 1 • FAX: +352 768 495 • SALES@DYNABRADE.LU

www.dynabrade.com