



# UNITISED DISCS & WHEELS

Reorder No. EUR09.25

*For consistent finish with Dynabrade Disc Sanders and Straight Angle Die Grinders.*

## DU 368H UNITISED WHEELS

DIMENSION	ATTACHMENT TYPE	GRIT	MATERIAL	P/N	QTY/BOX
75 mm	Hole 6 mm	2 SFIN	S/C	72990	25
75 mm	Hole 6 mm	3 SFIN	S/C	72991	25
75 mm	Hole 6 mm	2 AMED	A/O	72992	25
75 mm	Hole 6 mm	6 AMED	A/O	72993	25
75 mm	Hole 6 mm	8 ACRS	A/O	72994	25

p/n 72990



## DU 368R UNITISED DISCS LOCKING-TYPE

DIMENSION	ATTACHMENT TYPE	GRIT	MATERIAL	P/N	QTY/BOX
75 mm	Locking-Type	2 SFIN	S/C	72980	10
75 mm	Locking-Type	3 SFIN	S/C	72981	10
75 mm	Locking-Type	2 AMED	A/O	72982	10
75 mm	Locking-Type	6 AMED	A/O	72983	10
75 mm	Locking-Type	8 ACRS	A/O	72984	10

p/n 72980



## DU 368F UNITISED DISCS Mounted on FIBREGLASS BACKING

DIMENSION	ATTACHMENT TYPE	GRIT	MATERIAL	P/N	QTY/BOX
115 mm	Hole 22 mm	2 SFIN	S/C	72985	10
115 mm	Hole 22 mm	3 SFIN	S/C	72986	10
115 mm	Hole 22 mm	2 AMED	A/O	72987	10
115 mm	Hole 22 mm	6 AMED	A/O	72988	10
115 mm	Hole 22 mm	8 ACRS	A/O	72989	10

p/n 72985



p/n 72998




## MANDREL

ATTACHMENT TYPE	P/N	QTY/BOX
Shaft 6 mm	72998	5

## CHARACTERISTICS

- Compressed non-woven layers in A/O for general purpose or in S/C for delicate applications.
- Available in locking and hole attachment type.
- Different densities and grits to choose from according to desired flexibility and aggressivity.

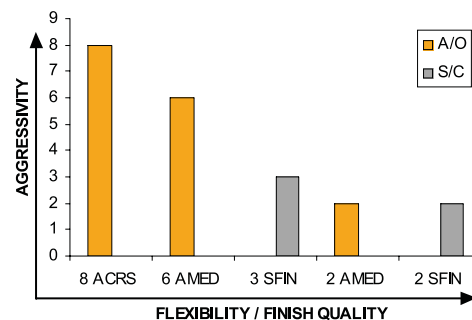

## APPLICATIONS & MARKETS

- Ideal for work on metal, exotic alloys, titanium and stainless steel.
- Used for deburring, blending and finishing applications.
- Removes discoloration after welding operations.
- Achieves satin finish after weld cleaning.
- "Hard" density product (flexibility 6 & 8) for faster cut and longer lifespan.
- "Soft" density product (flexibility 2 & 3) where finer finish and flexibility is important.



## FEATURES & BENEFITS

- Controlled cut, cool running, low loading.
- Flexible structure of the material reduces the risk of damage to the work piece.
- Compressed layers of non-woven material for consistent and uniform finish with extended lifespan.
- Excellent alternative to set-up wheels, greaseless compounds and steel wool.
- Efficient removal with gloss finish.



DYNABRADE EUROPE S.à.r.l.

ZONE ARTISANALE OP TOMM 6 • L-5485 WORMELDANGE-HAUT • LUXEMBOURG • TEL.: +352 768 494 1 • FAX: +352 768 495 • [SALES@DYNABRADE.LU](mailto:SALES@DYNABRADE.LU)

[www.dynabrade.com](http://www.dynabrade.com)