

Downdraft Sanding Tables

- Keep shop area free of dust while sanding, grinding, etc.
- Great for sanding:
 - Fiberglass spoilers and wings
 - Doors and quarter panels
 - Motorcycle frames, fenders and gas tanks
 - Custom car, truck and van parts, etc.
- Easy to use, safe, unlike flimsy fender stands.
- No vacuum-type tools needed; use any sander/grinder.
- Keep machine on even when not in use – table actually filters air to help clean the shop environment.




Standard Duty Models

- | | | |
|---|-------------------------------|-------------------------------|
| 64201 | 64699 | 64700 |
| • 33" W x 41" L working area. | • 33" W x 60" L working area. | • 36" W x 72" L working area. |
| • Dual filtration – includes three 20" wide x 25" long x 2" thick, 1-micron pleated filters, and one 5-micron pre-filter blanket. | | |
| • Includes 5" diameter casters and two dust-tight electric outlets. | | |
| • Rhino Linings® coated tabletop is durable and anti-slip. | | |
| • Two handy storage compartments for tools and accessories. | | |

Specifications

- **Power Source:** One heavy duty electric motor, 1.0 Hp
- **Electric Capacity:** 110 volt, 220 volt (single phase). Three phase available upon request.
- **Two Paper Filter Sizes Available:**
 - 64671: 20" wide x 25" long x 2" thick standard paper air filter
 - 64672: 20" wide x 25" long x 2" thick UL rated class I non-flammable air filter.

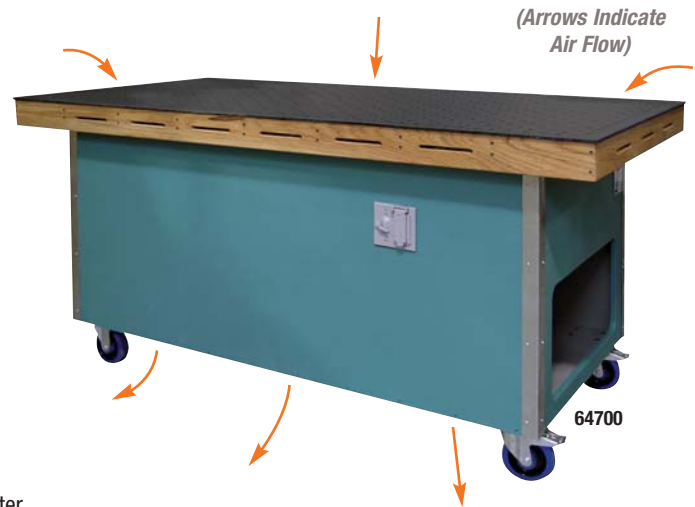

Heavy Duty Model

- **64657**
- 48" wide x 96" long working area. Includes six 20" x 25" paper filters (64658) and four 16" x 25" paper filters (64659).
- Dual filtration – 5-micron pre-filter blanket and 1-micron paper filters.
- High quality reverse incline blowers. Heavy duty TEFC twin electric motors. Non-slip surface for easier tool maneuverability.
- Up to 70% more filter area than competitive brands.
- Base unit is all-metal construction with CNC milled 3/4" MDF tabletop.
- Optional anti-static and anti-slip mat available (P/N 64970) as well as optional 5" diameter casters.

Specifications

- **Power Source:** Two heavy duty TEFC electric motors, 1.5 Hp
- **Electric Capacity:** 115 volt (single phase). 208 volt (three phase), 230 volt (single phase), 230 volt (three phase), 460 volt (three phase) available upon request.
- **Sound Level:** 72 dB(A)
- **Shipping Weight:** 820 lbs.



Model Number	Motor Hp	Volts	Phase	Vacuum Suction	Sound Level	Working Area Width	Working Area Length	Height Inch	Shipping Weight
64201	1	110/220	1	3,000 CFM	72 dB(A)	33"	41"	36	275 lbs.
64657	1.5 (dual)	115	1	7,000 CFM	75 dB(A)	48"	96"	36	970 lbs.
64699	1	110/220	1	3,000 CFM	72 dB(A)	33"	60"	36	285 lbs.
64700	1	110/220	1	3,000 CFM	72 dB(A)	36"	72"	36	365 lbs.