

Electric Dynorbital®

120 Volt Electric-Powered Random Orbital Sander


ABRASIVE
CAPACITY

ABRASIVE DISCS

5" (127 mm) and 6" (152 mm)
diameter

Ready for Connection to Central Vacuum System

- Central Vacuum models have 1-1/4" outside diameter vacuum port for easy connection to central vacuum system.
- All models include a vacuum shroud that becomes operational when vacuum style pad (included) is mounted.
- Double-insulated electric motor with 8 ft. cord connects to standard 120 volt outlet.
- Repositionable side handle for left or right hand operation.

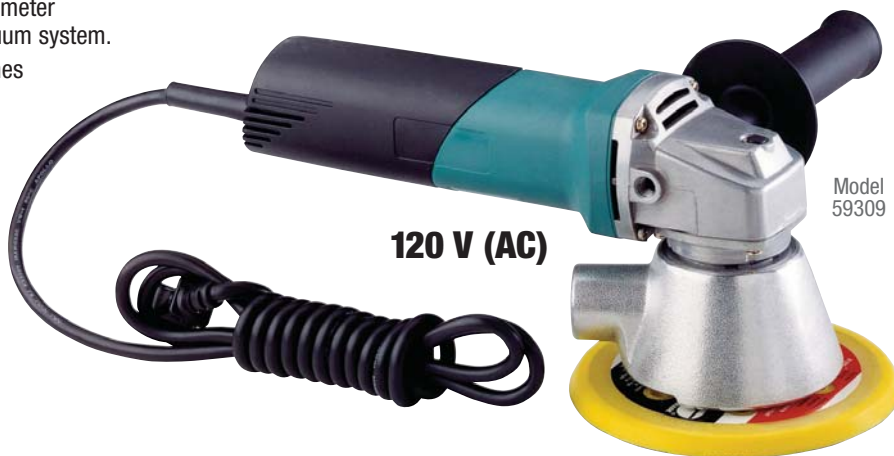

5" Diameter Models, Central Vacuum

Model 59306 3/8" Dia. Orbit

- Includes 56104 Vinyl-Face Vacuum Pad.

Model 59307 3/16" Dia. Orbit

- Includes 56104 Vinyl-Face Vacuum Pad.


6" Diameter Models, Central Vacuum

Model 59308 3/8" Dia. Orbit


- Includes 56105 Vinyl-Face Vacuum Pad.

Model 59309 3/16" Dia. Orbit

- Includes 56105 Vinyl-Face Vacuum Pad.



3/8" (10 mm) Dia. Orbit
For Aggressive Sanding



3/16" (5 mm) Dia. Orbit
For General Sanding



For efficient random orbital sanding and uniform finish, move the tool in "north-to-south" pattern, then change to "east-to-west" pattern. Be sure to sand complete surface in each pattern.

Remember the rule of "start ON, stop OFF." Place the tool ON the work surface before starting it, and move running tool OFF the surface before stopping it. This will help to prevent unwanted swirl marks.



Model Number	Motor hp (W)	Motor RPM	Pad Diameter Inch (mm)	Voltage	Current	Phase	Frequency	Weight Pound (kg)	Length Inch (mm)	Height Inch (mm)
59306	.8 (596)	11,600	5 (127)	120 V (AC)	6.8 Amps	1	60 Hz	5 (2.3)	12 (305)	5-1/2 (140)
59307	.8 (596)	11,600	6 (152)	120 V (AC)	6.8 Amps	1	60 Hz	5 (2.3)	12 (305)	5-1/2 (140)
59308	.8 (596)	11,600	5 (127)	120 V (AC)	6.8 Amps	1	60 Hz	5 (2.3)	12-1/2 (318)	5-1/2 (140)
59309	.8 (596)	11,600	6 (152)	120 V (AC)	6.8 Amps	1	60 Hz	5 (2.3)	12-1/2 (318)	5-1/2 (140)

Tune-Up Kit: No. 42735 (page 192) • Additional Specifications: Tool Thread 5/16"-24 Male



FASTTRACK